

GD4013B

DUAL D FLIP-FLOP

DESCRIPTION – The 4013B is a CMOS Dual D Flip-Flop which is edge-triggered and features independent Set Direct, Clear Direct, and Clock inputs. Data is accepted when the Clock is LOW and transferred to the output on the positive-going edge of the Clock. The active HIGH asynchronous Clear Direct (C_D) and Set Direct (S_D) are independent and override the D or Clock inputs. The outputs are buffered for best system performance.

PIN NAMES

D	Data Input
CP	Clock Input (L→H Edge-Triggered)
S_D	Asynchronous Set Direct Input (Active HIGH)
C_D	Asynchronous Clear Direct Input (Active HIGH)
Q	True Output
\bar{Q}	Complement Output

4013B TRUTH TABLES


ASYNCHRONOUS INPUTS		OUTPUTS	
S_D	C_D	Q	\bar{Q}
L	H	L	H
H	L	H	L
H	H	H	H

L = LOW Level
 H = HIGH Level
 \uparrow = Positive-Going Transition
 Q_{n+1} = State After Clock Positive Transition

SYNCHRONOUS INPUTS		OUTPUTS	
CP	D	Q_{n+1}	\bar{Q}_{n+1}
\uparrow	L	L	H
\uparrow	H	H	L

Conditions: $S_D = C_D = \text{LOW}$

LOGIC SYMBOL

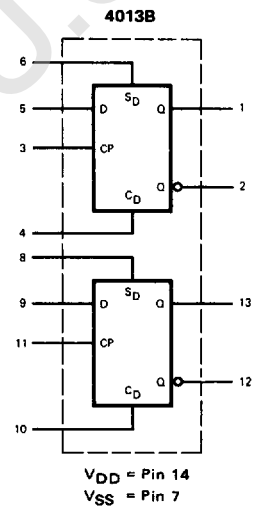

CONNECTION DIAGRAM DIP (TOP VIEW)



NOTE:
 The SO Package has the same pinouts (Connection Diagram) as the Dual In-line Package.

GS CMOS · GD4013B

DC CHARACTERISTICS: V_{DD} as shown, $V_{SS} = 0\text{ V}$ (See Note 1)

SYMBOL	PARAMETER	LIMITS									UNITS	TEMP	TEST CONDITIONS	
		$V_{DD} = 5\text{ V}$			$V_{DD} = 10\text{ V}$			$V_{DD} = 15\text{ V}$						
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX				
I_{DD}	Quiescent Power	XC			4			8			16	μA	MIN, 25°C	All inputs at 0 V or V_{DD}
					30			60			120		MAX	
	Supply Current	XM			1			2			4	μA	MIN, 25°C	
					30			60			120		MAX	





AC CHARACTERISTICS AND SET-UP REQUIREMENTS: V_{DD} as shown, $V_{SS} = 0\text{ V}$, $T_A = 25^\circ\text{C}$ (See Note 3)

SYMBOL	PARAMETER	LIMITS									UNITS	TEST CONDITIONS
		$V_{DD} = 5\text{ V}$			$V_{DD} = 10\text{ V}$			$V_{DD} = 15\text{ V}$				
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX		
t_{PLH}	Propagation Delay, CP TO Q, \bar{Q}		95	200		38	90		29	72	ns	$C_L = 50\text{ pF}$, $R_L = 200\text{ k}\Omega$ Input Transition Times < 20 ns
t_{PHL}			95	200		38	90		29	72	ns	
t_{PLH}	Propagation Delay, S_D or C_D to \bar{Q}		130	225		45	110		32	88	ns	
t_{PHL}			75	225		35	110		20	88	ns	
t_{PLH}	Propagation Delay, S_D or C_D to Q		115	225		50	110		35	88	ns	
t_{PHL}			115	225		50	110		35	88	ns	
t_{TLH}	Output Transition Time		60	135		30	70		20	45	ns	
t_{THL}			60	135		30	70		20	45	ns	
t_s	Set-Up Time, Data to CP	60	30		30	15		24	8		ns	
t_h	Hold Time, Data to CP	0	-25		0	-12		0	-6		ns	
$t_{wCP(L)}$	Minimum Clock Pulse Width	100	55		55	30		44	18		ns	
$t_{wSD(H)}$	Minimum S_D Pulse Width	60	30		30	15		24	10		ns	
$t_{wCD(H)}$	Minimum C_D Pulse Width	60	30		30	15		24	10		ns	
t_{recSD}	Recovery Time for S_D	20	8		10	2		8	2		ns	
t_{recCD}	Recovery Time for C_D	30	15		15	7		12	6		ns	
f_{MAX}	Maximum CP Frequency (Note 2)	5	8		8	16		9	19		MHz	


NOTES:

1. Additional DC Characteristics are listed in this section under 4000B Series CMOS Family Characteristics.
2. For f_{MAX} Input rise and fall times are greater than or equal to 5 ns and less than or equal to 20 ns.
3. Propagation Delays and Output Transition Times are graphically described in this section under 4000B Series CMOS Family Characteristics.
4. It is recommended that input rise and fall times to the Clock Input be less than 15 μs at $V_{DD} = 5\text{ V}$, 4 μs at $V_{DD} = 10\text{ V}$, and 3 μs at $V_{DD} = 15\text{ V}$.


TYPICAL ELECTRICAL CHARACTERISTICS

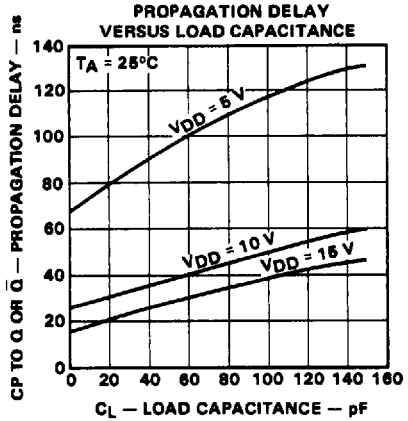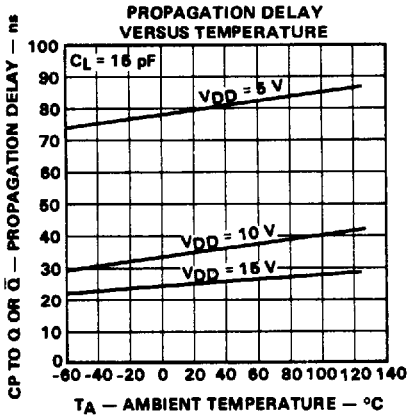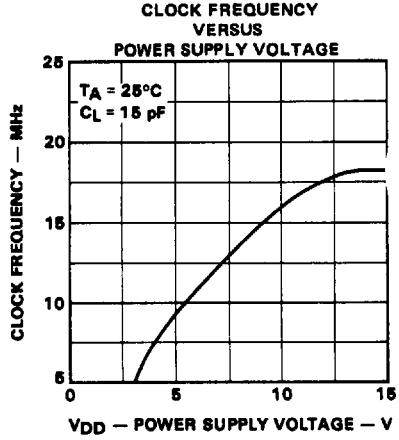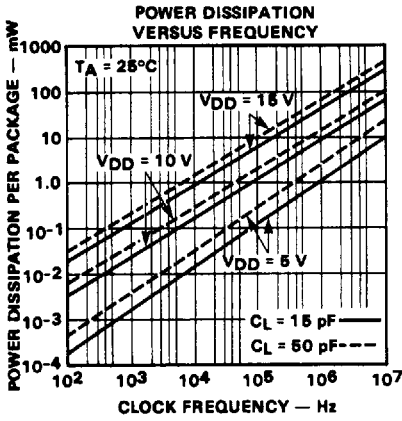

WAVEFORMS



SET-UP TIMES, HOLD TIMES, AND MINIMUM CLOCK PULSE WIDTH

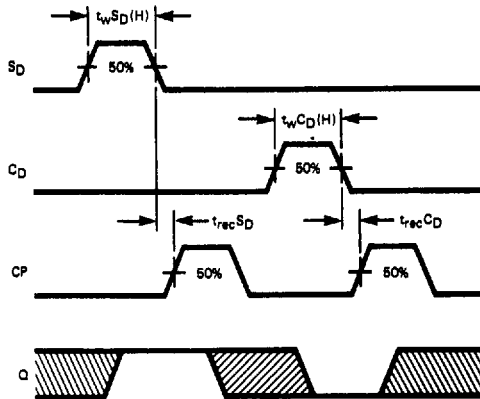

RECOVERY TIME FOR SD, RECOVERY TIME FOR CD, MINIMUM SD PULSE WIDTH, AND MINIMUM CD PULSE WIDTH

NOTE: Set-up Times and Hold Times are shown as positive values but may be specified as negative values.